

GURN

Central Loose Tube Cables
Universal – Indoor/Outdoor
A/I-DQ(ZN)BH

Improved Rodent Protection, 1000N Permanent Load
2017-03-07 v8.0

Ordering Information

Belden European Part Numbers

Fibre Description / count	2	4	6	8	12	24
62.5/125-OM1	GURN102	GURN104	GURN106	GURN108	GURN112	GURN124
50/125-OM2 BI	GURN202	GURN204	GURN206	GURN208	GURN212	GURN224
50/125-OM3 BI	GURND02	GURND04	GURND06	GURND08	GURND12	GURND24
50/125-OM4 BI	GURNE02	GURNE04	GURNE06	GURNE08	GURNE12	GURNE24
9/125 ITU G.655 C&D	GURN702	GURN704	GURN706	GURN708	GURN712	GURN724
9/125 ITU G.652D & G.657A1 BI	GURN802	GURN804	GURN806	GURN808	GURN812	GURN824
9/125 ITU G.657A2 BI	GURNF02	GURNF04	GURNF06	GURNF08	GURNF12	GURNF24
9/125 ITU G.657B3 BI	GURNI02	GURNI04	GURNI06	GURNI08	GURNI12	GURNI24
Std. plywood reel (non-returnable)	Ø800*475mm 7.65 kg					
Std. delivery length	2100m ± 105m					


Applications

- For **outdoor and indoor** use in structured (data) wiring systems such as, campus backbone, **building backbone (riser)** and/or horizontal cabling. Support all computer network applications such as FDDI, GIGAbit Ethernet and ATM.
- **Easy to install** in ducts, tunnels, trenches. Suitable for **direct burial**.

Features & Benefits

- These cables are **halogen-free** (=FRNC and LSNH) and therefore suitable for both outdoor and indoor use. Consequently splicing can be avoided and the installation gets more cost-effective.
- A simple **all dielectric** cable construction (and consequently **more cost-effective up to 24** fibres then multi-tube cables) with **improved rodent protection**.
- **Predicted lifetime > 30 years**.

Construction & Dimensions

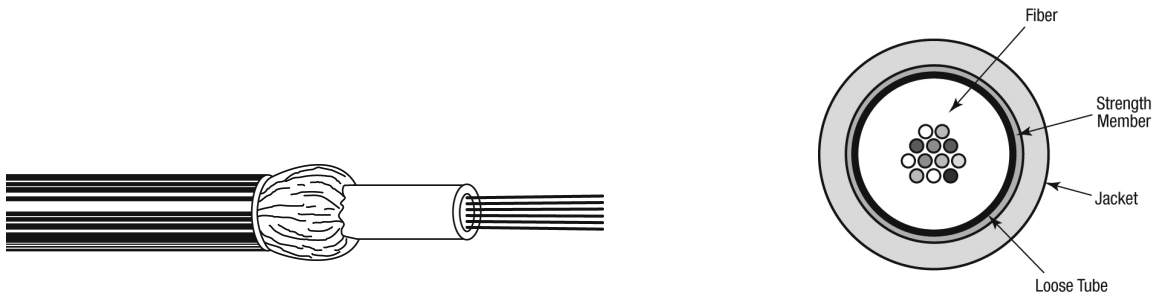

Cable Specifications (construction in accordance with IEC 60794)

1. Primary coated optical fibres: $\varnothing 250 \pm 15 \text{ um}$.
2. Central tube, jelly filled (**non-dripping and silicon-free**) with **up to 24 fibres**.
Individually colour coded optical fibres:
 - 1 – 12: red – natural – yellow – blue – green – violet – brown – black – orange - turquoise – pink and white.
 - 13 – 24: red – natural – yellow – blue – green – violet – brown – grey – orange – turquoise – pink and white with rings.
3. Swellable glass yarns as strength members and for the longitudinal watertightness and the **improved rodent protection**.
4. Orange UV resistant (FRNC/LSNH) outer jacket.
Identification: BELDEN OFC – “cable type” – number x type of fibre + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 24
\varnothing Central tube (mm)	3.3
\varnothing nom./max. (mm)	7.1 / 7.4
Weight (kg/km)	55
Energy of flame (kJ/m)	755

Optical Characteristics

Characteristics Single-Mode – Matched-Cladded optical fibres according to ITU.

European P/N Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation ^B typical/ max. (dB/km)	Dispersion (ps/(nm·km))	PMD ^A (ps/km)	Cable Cut-off Wave-length (nm)
7	9/125 G.655 C&D	8.4 ± 0.6 125 ± 0.7	1550 1625	0.2 / 0.22 0.21 / 0.24	≤ 4.5 ≤ 7.9	≤ 0.04	≤ 1260
8	9/125 G.652D & G.657A1 BI OS2	9.2 ± 0.4 125 ± 0.7	1310 1550 1625	0.33 / 0.34 0.18 / 0.19 0.20 / 0.24	≤ 3.2 ≤ 17	≤ 0.06	≤ 1260
F	9/125 G.657A2 BI	8.9 ± 0.4 124.8 ± 0.3	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.24	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
I	9/125 G.657B3 BI	8.8 ± 0.4 125 ± 0.4	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.23	≤ 3.5 ≤ 18	≤ 0.06	≤ 1260

Note A- Link design value

Note B- Due to cabling the optical attenuation values can increase with max. 0.05 dB/km

Characteristics Multi-Mode Graded-Index optical fibres according to IEC 60793

European P/N Coding, Position 5	Fibre-Type	Core/ Cladding Diameter (um)	Wave-length (nm)	Attenuation ^C typical/ max. (dB/km)	Bandwidth (MHz·km)	Ethernet Performance (m)		Num. Apert. (µm)
						1 GBE	10 GBE	
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.0 0.7 / 0.8	≥ 200 ≥ 600	220 550	33 300	0.275 ± 0.015
2	50/125 OM2 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 500 ≥ 500	600 600	83 300	0.20 ± 0.015
D	50/125 OM3 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 1500 ≥ 500	1000 550	300 300	0.20 ± 0.015
E	50/125 OM4 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 3500 ≥ 500	1100 550	550 300	0.20 ± 0.015

Note C- Due to cabling the optical attenuation values can increase with max. 0.4 dB/km

Macro Bending Performance Fibers

Maximum attenuation increase for Bend Insensitive Single Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 30 mm (dB)	Turns 10 Radius 15 mm (dB)	Turn 1 Radius 16 mm (dB)	Turn 1 Radius 10 mm (dB)	Turn 1 Radius 7.5 mm (dB)	Turn 1 Radius 5 mm (dB)
7	9/125 G.655 C & D	1550 1625	0.05 0.05		0.5 0.5			
8	9/125 G.652D & G.657A1 BI OS2	1550 1625	0.03 0.03	0.25 1.0		0.75 1.5		
F	9/125 G.657A2 BI	1550 1625		0.03 0.1		0.1 0.2	0.5 1.0	
I	9/125 G.657B3 BI	1550 1625				0.03 0.1	0.08 0.25	0.15 0.45

Maximum attenuation increase for Bend Insensitive Multi Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 37.5 mm (dB)	Turns 2 Radius 15 mm (dB)	Turns 2 Radius 7.5 mm (dB)
1	62.5/125 OM1	850 1300	0.5 0.5		
2	50/125 OM2 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
D	50/125 OM3 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
E	50/125 OM4 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5

Mechanical, Physical and/or Environmental Characteristics

Description:	Tested according to:	Requirement:	According to Family specification:
Storage Temperature Range	IEC 60794-1-22-F1	-30 to +70 °C	IEC 60794-3-10
Installation Temperature Range		-5 to +40 °C	
Operating Temperature Range		-30 to +70 °C	
Bending Radius Tube (Installation and Operation)		> 25 mm	
Cable Water Blocking	IEC 60794-1-22-F5	Pass	
Cable Min. Bend Radius Operation (Long Term)	IEC 60794-1-21-E11	10 x Cable Diam.	IEC 60794-3-10
Cable Min. Bend Radius Installation (Short Term)	IEC 60794-1-21-E6	20 x Cable Diam.	
Cable Max. Tensile Strength Operation (Long Term)	IEC 60794-1-21-E1	1000 N	IEC 60794-3-10
Cable Max. Tensile Strength Installation (Short Term)		3000 N	
Cable Max. Crush Resistance Operation (Long Term)	IEC 60794-1-21-E3	7.5 kN/m	IEC 60794-3-10
Cable Max. Crush Resistance Installation (Short Term)		15 kN/m	

Safety

	Testing standard	Description / Value
Reaction to fire	IEC 60332-1	
Toxicity	NF X 70-100-2	
Smoke density	IEC 61034-2	
Halogen acid gas content	IEC 60754-1	Zero
Degree of acidity of gases	IEC 60754-2	Min. 4.3 pH
	IEC 60754-2	Max. 10 µS/mm

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions ≥ 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Outdoor cables with a black PE outer jacket.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.