

GUCN

Central Loose Tube Cables

Universal – Indoor / Outdoor - Corrugated Steel Tape Armor (CST)

A/I-DQ(ZN)(SR)H

Full Rodent Protection

2017-03-07 v12.0

Ordering Information

Belden European Part Numbers

Fibre Description / count	2	4	6	8	12	16	24
62.5/125-OM1	GUCN102	GUCN104	GUCN106	GUCN108	GUCN112	GUCN116	GUCN124
50/125-OM2 BI	GUCN202	GUCN204	GUCN206	GUCN208	GUCN212	GUCN216	GUCN224
50/125-OM3 BI	GUCND02	GUCND04	GUCND06	GUCND08	GUCND12	GUCND16	GUCND24
50/125-OM4 BI	GUCNE02	GUCNE04	GUCNE06	GUCNE08	GUCNE12	GUCNE16	GUCNE24
9/125 ITU G.655 C&D	GUCN702	GUCN704	GUCN706	GUCN708	GUCN712	GUCN716	GUCN724
9/125 ITU G.652D & G.657A1 BI	GUCN802	GUCN804	GUCN806	GUCN808	GUCN812	GUCN816	GUCN824
9/125 ITU G.657A2 BI	GUCNF02	GUCNF04	GUCNF06	GUCNF08	GUCNF12	GUCNF16	GUCNF24
9/125 ITU G.657B3 BI	GUCNI02	GUCNI04	GUCNI06	GUCNI08	GUCNI12	GUCNI16	GUCNI24
Std. plywood reel (non-returnable)	Ø 1000 * 588 mm 18 kg						
Std. delivery length	2100 ± 105m						


Applications

- For **outdoor and indoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor and indoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches. Suitable for direct burial.

Features & Benefits

- A simple cable construction and consequently **more cost-effective up to 24 fibres** than multi-tube cables.
- **High mechanical and full rodent protection** provided by corrugated steel tape (**CST**) armour.
- **Predicted lifetime > 30 years.**

Construction & Dimensions

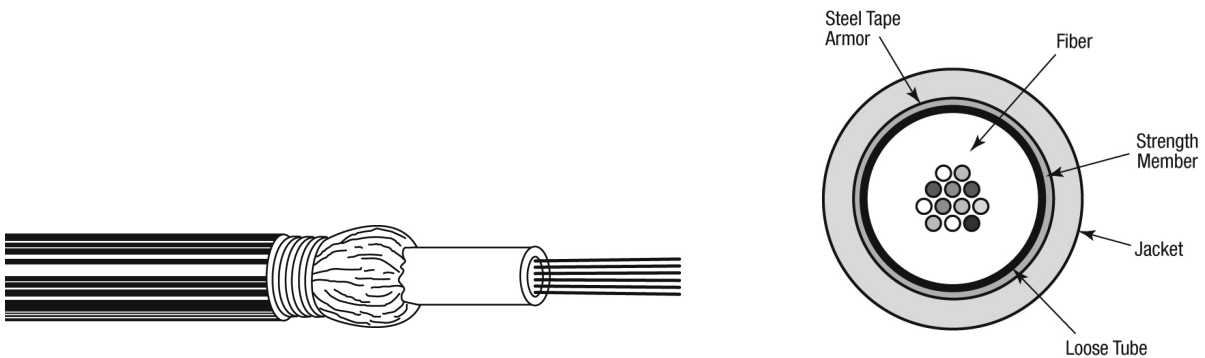

Cable Specifications (construction in accordance with IEC 60794)

1. Primary coated optical fibres: $\text{Ø } 250 \pm 15 \text{ }\mu\text{m}$.
2. Central tube, jelly filled (**non-dripping and silicon-free**) with **up to 24 fibres**.
Individually colour coded optical fibres:
1 – 12: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white.
13 – 24: red – natural – yellow – blue – green – violet – brown – grey – orange – turquoise – pink and white
with rings.
3. Water swellable E-glass yarns as strength members and for the **longitudinal watertightness**, surrounded by swelling tape.
4. Corrugated Steel Tape Armouring (CST): longitudinally applied steel tape (0.155 mm).
5. Black UV resistant FRNC/LSNH outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 24
Ø Central tube (mm)	3.3
Ø nom./max. (mm)	9.0/9.3
Energy of flame (kJ/m)	1045
Weight (kg/km)	103

Optical Characteristics

Characteristics Single-Mode – Matched-Cladded optical fibres according to ITU.

European P/N Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation ^B typical/ max. (dB/km)	Dispersion (ps/(nm·km))	PMD ^A (ps/km)	Cable Cut-off Wave-length (nm)
7	9/125 G.655 C&D	8.4 ± 0.6 125 ± 0.7	1550 1625	0.2 / 0.22 0.21 / 0.24	≤ 4.5 ≤ 7.9	≤ 0.04	≤ 1260
8	9/125 G.652D & G.657A1 BI OS2	9.2 ± 0.4 125 ± 0.7	1310 1550 1625	0.33 / 0.34 0.18 / 0.19 0.20 / 0.24	≤ 3.2 ≤ 17	≤ 0.06	≤ 1260
F	9/125 G.657A2 BI	8.9 ± 0.4 124.8 ± 0.3	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.24	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
I	9/125 G.657B3 BI	8.8 ± 0.4 125 ± 0.4	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.23	≤ 3.5 ≤ 18	≤ 0.06	≤ 1260

Note A- Link design value

Note B- Due to cabling the optical attenuation values can increase with max. 0.05 dB/km

Characteristics Multi-Mode Graded-Index optical fibres according to IEC 60793

European P/N Coding, Position 5	Fibre-Type	Core/ Cladding Diameter (um)	Wave-length (nm)	Attenuation ^C typical/ max. (dB/km)	Bandwidth (MHz·km)	Ethernet Performance (m)		Num. Apert. (µm)
						1 GBE	10 GBE	
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.0 0.7 / 0.8	≥ 200 ≥ 600	220 550	33 300	0.275 ± 0.015
2	50/125 OM2 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 500 ≥ 500	600 600	83 300	0.20 ± 0.015
D	50/125 OM3 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 1500 ≥ 500	1000 550	300 300	0.20 ± 0.015
E	50/125 OM4 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 3500 ≥ 500	1100 550	550 300	0.20 ± 0.015

Note C- Due to cabling the optical attenuation values can increase with max. 0.4 dB/km

Macro Bending Performance Fibers

Maximum attenuation increase for Bend Insensitive Single Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 30 mm (dB)	Turns 10 Radius 15 mm (dB)	Turn 1 Radius 16 mm (dB)	Turn 1 Radius 10 mm (dB)	Turn 1 Radius 7.5 mm (dB)	Turn 1 Radius 5 mm (dB)
7	9/125 G.655 C & D	1550 1625	0.05 0.05		0.5 0.5			
8	9/125 G.652D & G.657A1 BI OS2	1550 1625	0.03 0.03	0.25 1.0		0.75 1.5		
F	9/125 G.657A2 BI	1550 1625		0.03 0.1		0.1 0.2	0.5 1.0	
I	9/125 G.657B3 BI	1550 1625				0.03 0.1	0.08 0.25	0.15 0.45

Maximum attenuation increase for Bend Insensitive Multi Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 37.5 mm (dB)	Turns 2 Radius 15 mm (dB)	Turns 2 Radius 7.5 mm (dB)
1	62.5/125 OM1	850 1300	0.5 0.5		
2	50/125 OM2 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
D	50/125 OM3 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
E	50/125 OM4 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5

Mechanical, Physical and/or Environmental Characteristics

Description:	Tested according to:	Requirement:	According to Family specification:
Storage Temperature Range	IEC 60794-1-22-F1	-30 to +70 °C	IEC 60794-3-10
Installation Temperature Range		-5 to +40 °C	
Operating Temperature Range		-30 to +70 °C	
Bending Radius Tube (Installation and Operation)		> 25 mm	
Cable Water Blocking	IEC 60794-1-22-F5	Pass	
Cable Min. Bend Radius Operation (Long Term)	IEC 60794-1-21-E11	20 x Cable Diam.	IEC 60794-3-10
Cable Min. Bend Radius Installation (Short Term)	IEC 60794-1-21-E6	20 x Cable Diam.	
Cable Max. Tensile Strength Operation (Long Term)	IEC 60794-1-21-E1	500 N	IEC 60794-3-10
Cable Max. Tensile Strength Installation (Short Term)		1500 N	
Cable Max. Crush Resistance Operation (Long Term)	IEC 60794-1-21-E3	11 kN/m	IEC 60794-3-10
Cable Max. Crush Resistance Installation (Short Term)		22 kN/m	

Safety

	Testing standard	Description / Value
Reaction to fire	IEC 60332-1 IEC 60332-3-22 EN 50575	Cca-s1,d1,a1
Circuit Integrity	IEC 60331-25 EN 50200	E120: duration of test 120 minutes PH120: duration of test 120 minutes including shocks
Toxicity	NF X 70-100-2	
Smoke density	IEC 61034-2	
Halogen acid gas content	IEC 60754-1	Zero
Degree of acidity of gases	IEC 60754-1 IEC 60754-2	Min. 4.3 pH Max. 10 µS/mm

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for outdoor use only.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.